


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



American International
Car Stereo Installation Kits & Accessories

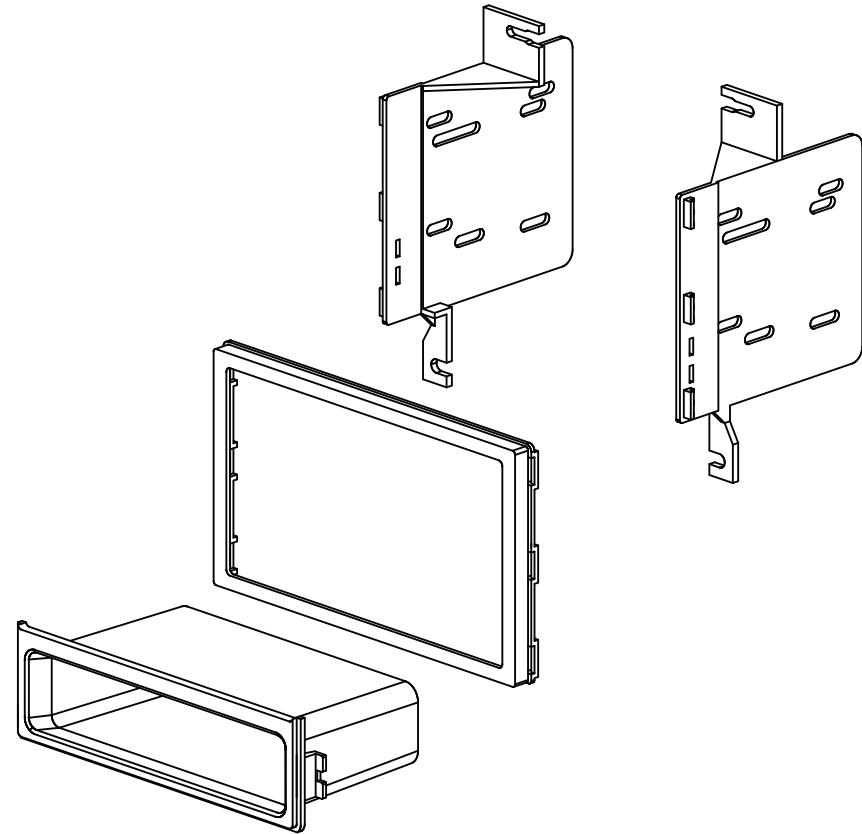

HYN-K1142 Mounting Kit



American International

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iHYNK1142

VEHICLE APPLICATIONS

Hyundai

2007-10 ELANTRA (radio delete vehicles only)

DASH DISASSEMBLY INSTRUCTIONS

1. Set the parking brake.
2. Using a panel removal tool, carefully unfasten and pull forward the trim bezel from around the radio.
3. Pull the radio trim bezel forward, disconnect all attached harnesses and remove radio trim bezel.
4. Remove the (4) Phillips screws securing the factory pocket and black out plate/bracket assembly to the sub-dash.
5. Pull the pocket and bracket assembly forward, disconnect all attached harnesses and antenna lead and remove pocket and bracket assembly.

KIT ASSEMBLY INSTRUCTIONS

Single ISO Mount Applications

1. This kit is an (ISO) mounting kit only.
2. The mounting sleeve of your new audio/video components and trim ring cannot be used when ISO mounting an aftermarket radio. Your audio/video component must have a removeable trim ring.
3. It is advisable to assemble the kit and new radio or audio/video component on a work bench, or flat surface when assembling so you can get the radio component(s) to be straight when tightening the mounting screws.
4. Start by loosely attaching the new radio component between the mounting brackets using the screws supplied with the kit or new radio.
5. FOR SINGLE ISO INSTALLATION ONLY:
Insert the pocket under the radio and lock into the slots provided on the mounting brackets. See Fig. A on page 2.
6. Slide the audio/video component forward or back for desired look and tighten the screws on the side brackets.
7. Install and wire the assembled radio component in the dash and secure to the sub-dash using the factory screws that were removed when removing the factory radio.
8. You may need to move the new audio/video component forward or back for a better look, or to allow the face of the new component to operate without interference.
9. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

Double ISO Mount Applications / Double DIN Mount Applications

1. This kit is an (ISO) mounting kit only.
2. The mounting sleeve of your new audio/video components and trim ring cannot be used when ISO mounting an aftermarket radio. Your audio/video components must have a removeable trim ring.
3. It is advisable to assemble the kit and new radio or audio/video component(s) on a work bench, or flat surface when assembling so you can get the radio component(s) to be straight when tightening the mounting screws.
4. Start by loosely attaching the new radio component(s) between the mounting brackets using the screws supplied with the kit or new radio.
5. Slide the audio/video component(s) forward or back for desired look and tighten the screws on the side brackets.
6. Install and wire the assembled radio component in the dash and secure to the sub-dash using the factory screws that were removed when removing the factory radio.
7. You may need to move the new audio/video component(s) forward or back for a better look, or to allow the face of the new component(s) to operate without interference.
8. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

