

# **CDK663** Mounting Ki



# www.aampglobal.com www.aius.net

2500 East Francis Street Ontario, CA 91761, U.S.A. Sales: (800) 477-2267

Intl: (727) 572-9255 Support: 888-228-5560

# **VEHICLE APPLICATION**

**DODGE** 

2007-08 CALIBER

**JEEP** 

2007-08 COMPASS 2007-08 PATRIOT

# **FACTORY PANEL MODIFICATION REQUIRED**

# PANEL PREPARATION


- Snap the cutting template supplied with the CDK663 to the radio opening of the OEM panel.
- Using the template as a guide cut inside of the template opening, clearing out the OEM panel that would prevent the CDK663 mainframe from snapping in.
  NOTE: THIS INSTALLATION KIT REQUIRES PROFESSIONAL INSTALLATION. THE OEM PANEL WILL NEED TO BE CUT TO MOUNT KIT.

## **KIT ASSEMBLY INSTRUCTIONS**

### **Double DIN Mount Application**

 Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible, or screws supplied with kit. Using the main frame of the CDK663 as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.

**NOTE:** Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio. Suggested.

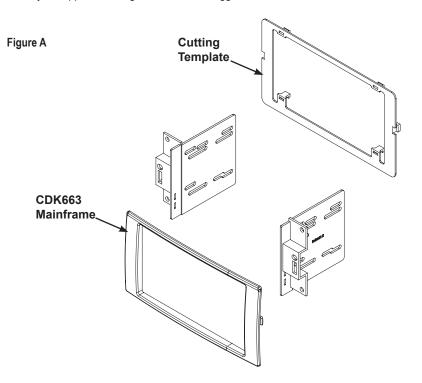

## 2007-08 DODGE CALIBER 2007-08 JEEP COMPASS

# DASH DISASSEMBLY INSTRUCTIONS

- 1. Engage the parking brake.
- 2. Carefully pry upward on the sides of the shifter trim bezel to release.
- 3. Put key in the ignition and turn to the on position (DO NOT START THE ENGINE)!!
- 4. Lower the shift lever to the low position.
- Starting at the bottom, carefully pry upward and outward on the Radio/Climate control trim bezel.
- 6. Carefully pull bezel forward to allow access to the screws securing the radio to the sub-dash.
- 7. Remove the (4) Phillips screws securing the radio to the sub-dash.
- 8. Pull radio forward, disconnect all attached harnesses and antenna lead and remove radio.

### 2007-08 JEEP PATRIOT

# DASH DISASSEMBLY INSTRUCTIONS

- 1. Carefully unsnap bezel surrounding radio and climate controls.
- 2. Disconnect harness attached to bezel.
- 3. Remove (4) screws securing radio in place.