

# GMK461 Mounting Kit



**www.aampglobal.com** **www.aius.net**  
2500 East Francis Street Ontario, CA 91761, U.S.A.  
Sales: (800) 477-2267  
Intl: (727) 572-9255  
Support: 888-228-5560

## VEHICLE APPLICATION

**Chevrolet**  
2018-19 Equinox

**NOTE:** The Sub Dash will need to be modified/trimmed to fit the radio chassis to allow room for the aftermarket radio.

## DASH DISASSEMBLY INSTRUCTIONS

1. Using a soft tool Unsnap the panel above the steering column, then unsnap and remove the panel around the instrument cluster.
2. From the area now exposed around the instrument cluster remove (1) 9/32" screw, then unsnap and remove the panel that extends from the instrument cluster to below the radio/climate controls and across the passenger side dash .
3. From the area now exposed below the radio/climate controls remove (4) 9/32" screws , then unsnap and remove the panel, unplugging ant harnesses.
4. From the area now exposed behind the climate control panel, remove (2) 9/32" screws. Unsnap and remove the radio, unplug any harnesses.
5. Remove (3) top clips from the radio. Save for kit installation.

**NOTE:** For models equipped with OnStar: You will need to relocate the module(s) somewhere not affecting the radio installation.


**NOTE:** The Sub Dash will need to be modified/trimmed to fit the radio chassis to allow room for the aftermarket radio.

## KIT ASSEMBLY INSTRUCTIONS

### Single ISO Mount Application

1. Install the (3) clips removed from the factory radio onto the 3 top post of the GMK461 INNER FRAME.
2. Insert pocket into lower section of the brackets.
3. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of the radio using screws provided with radio when possible, or screws supplied with kit.
4. Using the OUTER FRAME of the GMK461 as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.
5. Slide the radio with pocket and brackets into the GMK461 INNER FRAME
6. Insert the GMK461 OUTER FRAME over the radio/pocket.
7. Using the (6) screws provided, Install the OUTER FRAME to the rear of the INNER FRAME and radio brackets.

Figure A

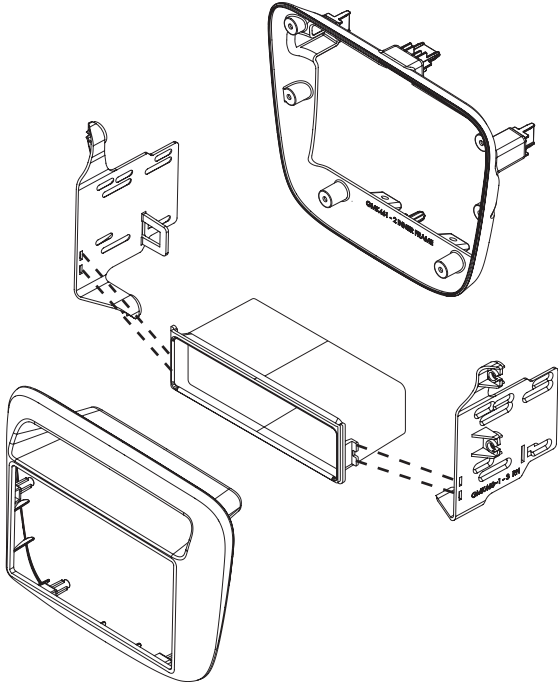

## DOUBLE DIN INSTALLATION INSTRUCTIONS

### Double DIN ISO Mount Application

See Fig B for bracket tab removal.

1. Install the (3) clips removed from the factory radio onto the 3 top post of the GMK461 INNER FRAME.
2. Remove pocket support tabs from both brackets.
3. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of the radio using screws provided with radio when possible, or screws supplied with kit.
4. Using the OUTER FRAME of the GMK461 as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.
5. Slide the radio and brackets into the GMK461 INNER FRAME
6. Insert the GMK461 OUTER FRAME over the radio.
7. Using the (6) screws provided, Install the OUTER FRAME to the rear of the INNER FRAME and radio brackets.

Figure B

Remove shaded tabs  
on left and right sides  
of the brackets  
(Right side not shown)

