


IN-DASH INSTALLATION KIT FOR 2007-UP CADILLAC ESCALADE/ESV/EXT

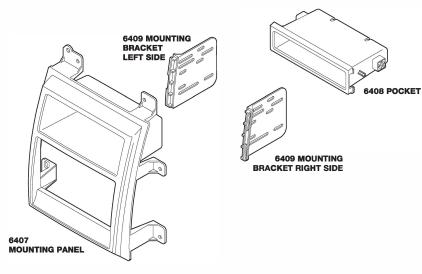

INTRODUCTION/PRELIMINARY

This premium installation kit is for 2007 Cadillac Escalade vehicles. Included are all the parts you need to mount your car stereo/cassette or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION:

DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIR BAG WIRING - AIR BAGS CAN ACCIDENTLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

FACTORY WIRING CODES

For Factory Wiring Codes go to: www.scosche-cars.com

CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

GM21SR

2007-up select General Motors with OnStar replacement interface

CRAB 2002-up Chrysler/Jeep antenna adapter





LIABILITY DISCLAIMER


This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this GM1521B kit for 2007 Cadillac Escalade vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

1-800-621-3695x3 SI 8/07 GM1521B (3000003)


MOUNTING THE STEREO

ISO DIN MOUNT

1. Snap the 6409 left and right brackets to the 6407 kit panel.

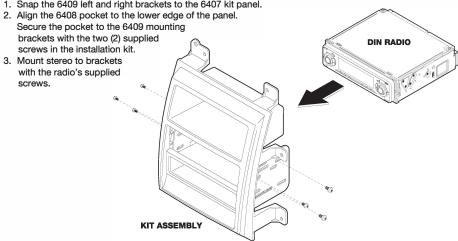

DOUBLE DIN MOUNT

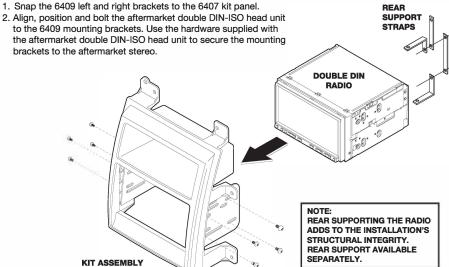

RADIO REMOVAL

2007 CADILLAC ESCALADE

- 1. Using a panel removal tool unsnap the cup holder/ashtray unplug and remove.
- 2. Using a panel removal tool unsnap trim above glovebox.
- 3. Using a panel removal tool unsnap trim around stereo.
- 4. Extract (6) 9/32" hex screws securing the factory radio.
- 5. Lift away disconnect and remove.