




**American
International**
Car Stereo Installation Kits & Accessories



SBK929GB Mounting Kit

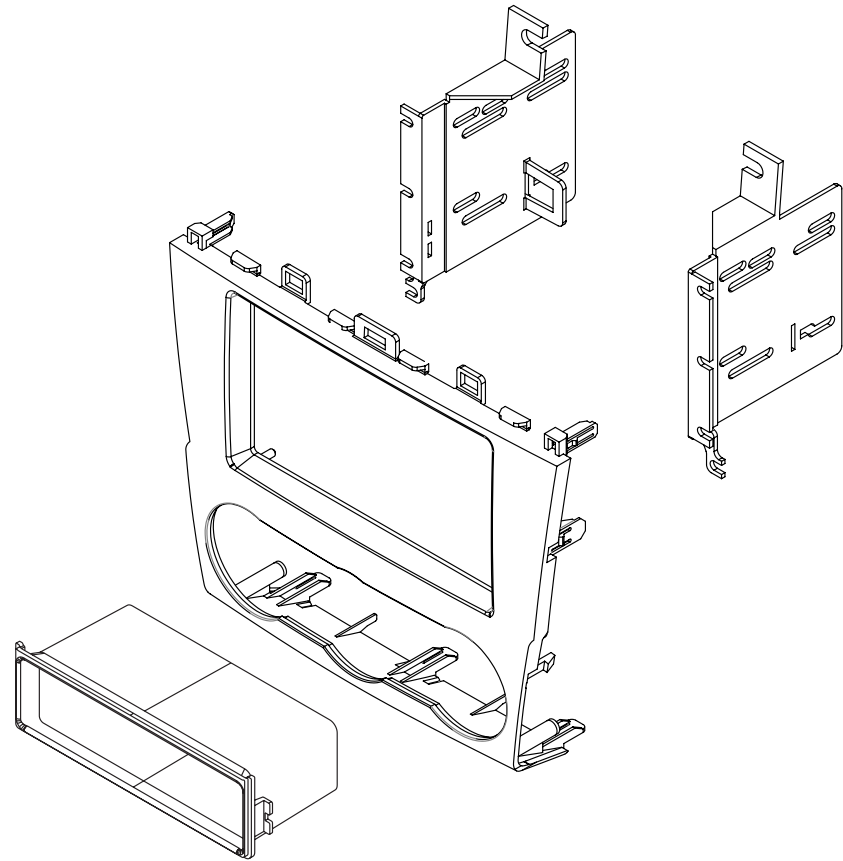

www.aampglobal.com www.aius.net
2500 East Francis Street Ontario, CA 91761, U.S.A.
Sales: (800) 477-2267
Intl: (727) 572-9255
Support: 888-228-5560

VEHICLE APPLICATION

Subaru
2016 FORESTER
2015-16 IMPREZA
2016 WRX
2015-16 XV CROSSTREK

iSBK929GB

DASH DISASSEMBLY INSTRUCTIONS

WARNING: Some OEM radio harnesses have very little slack and can be damaged when the OEM radio is removed. **Remove radio and harnesses with caution.**

1. Remove (1) #10 Phillips head screw located on the small panel located to the bottom right of the steering wheel. Remove Panel.
2. From the area on the driver side now exposed remove (1) 10mm bolt from the OEM radio bracket, located below the radio in the center of the dash. You will need a socket extension to reach the bolt.
3. Lower the glove box and remove.
4. From the area on the passenger side now exposed remove (1) 10mm bolt from the OEM radio bracket, located below the radio in the center of the dash. You will need a socket extension to reach the bolt.
5. Some models will have OEM climate control cables that will need to be released before the radio/climate control panel can be removed.
6. Using a soft tool unsnap panel above the radio that includes the air vents and hazard button. Unplug harnesses and remove.
7. From the are now exposed, remove (2) 10mm bolts from the OEM radio bracket
8. Gently unsnap and remove dash trim bezel, that includes the radio and climate controls.
9. Carefully Remove the factory radio and disconnect all wire harnesses.


KIT ASSEMBLY INSTRUCTIONS

Single ISO Mount Application

1. Remove the OEM climate controls from the factory bezel/radio brackets.
2. Install OEM climate controls into the SBK929GB mainframe using the bottom 2 screw
3. Insert pocket into lower section of the brackets and snap into rear pocket support tabs.
4. Install brackets to rear of main frame using the (6) screws provided.
5. Finish mounting the OEM climate controls along with the SBK929GB bracket supports using the remaining (2) Phillips head screws.
6. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible, or screws supplied with kit.
7. Using the main frame of the as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.

Note: Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio. Suggested

Figure A

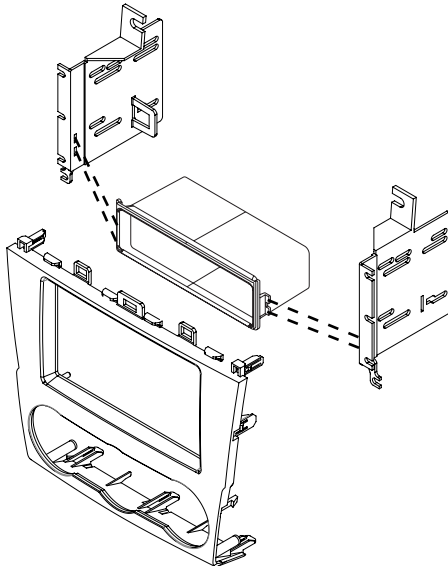

DOUBLE DIN INSTALLATION INSTRUCTIONS

Double DIN ISO Mount Application

See Fig B for bracket tab removal.

1. Remove the OEM climate controls from the factory bezel/radio brackets.
2. Install OEM climate controls into the SBK929GB mainframe using the bottom 2 screws only
3. See Fig B for removal of rear pocket support tabs.
4. Install brackets to rear of main frame using the (6) screws provided.
5. Finish mounting the OEM climate controls along with the SBK929GB bracket supports using the remaining (2) Phillips head screws.
6. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible, or screws supplied with kit.
7. Using the main frame of the as a guide, slide radio forward or backward for desired look and then tighten screws to the radio.

Note: Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio. Suggested

Figure B

Remove shaded tabs on left and right sides of the brackets (Right side not shown)

