http://www.aius.net







## WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006

## **CUSTOMER HELP LINE** USA 800-323-4329 • Canada 800-245-8777

# **VEHICLE APPLICATIONS**

Chevrolet 1995-97 S-10 BLAZER 1994-97 S-10 PICKUP

## **GMC**

1995-97 S-15 JIMMY 1994-97 S-15 SONOMA


### Isuzu

1996-97 HOMBRE

### Oldsmobile

1996-97 BRAVADA

# DASH DISASSEMBLY INSTRUCTIONS

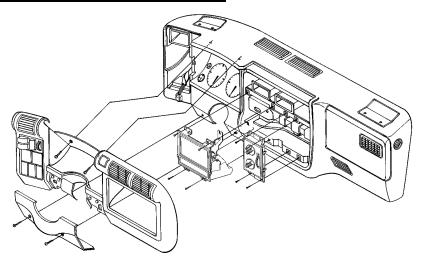


- Remove two bolts below the steering wheel and pop out trim.
   Warning: Be extremely cautious when removing entire
   bezel from above the steering column as the Hazard switch is very
   brittle and can break. Lowering of the steering column will give you
   the necessary clearance to remove dash bezel without damaging the
   Hazard button
- 2. Remove two screws above instrument panel and remove complete panel.
- 3. Unplug connectors to wiper controls and remove panel.
- Remove four 9/32" Bolts below and above radio/pocket and four 9/32" Bolts above and below A/C controls. Remove together.

## DIN MOUNT INSTRUCTIONS

- 1. Cut and remove shaft mount pieces from radio opening of kit as illustrated below.
- 2. Insert DIN sleeve from your new radio into the opening of the installation kit.
- 3. Depress the tabs from inside the sleeves opening upward, outward, and downward to secure sleeve to the installation kit.

Installation Tip: Removal of rear mounting stud support bar at rear of sub-dash may be necessary.

Depending on the depth of the new radio.



| NOTES: |
|--------|
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |
|        |