
For information about other American International automotive accessories visit our website at:

http://www.aius.net





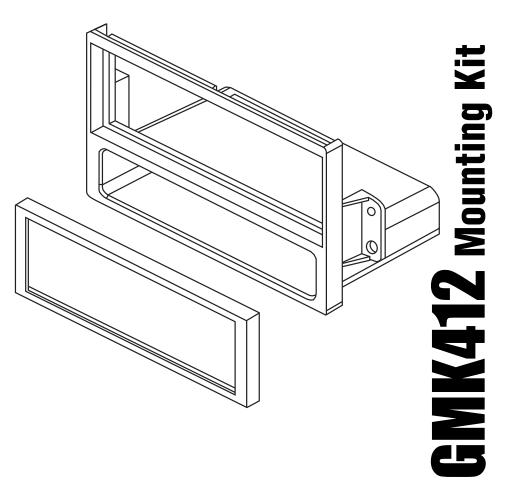

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

VEHICLE APPLICATIONS

Saturn 2003-05 ION 2000-05 L SERIES 2000-02 S SERIES 2002-05 VUE

IGMK412

©2015 AMERICAN INTERNATIONAL INDUSTRIES, INC.

2003-05 Saturn ION

DASH DISASSEMBLY INSTRUCTIONS

- 1. Carefully unclip and pull forward the radio dash trim bezel.
- 2. Unplug the hazard harness and remove trim bezel.
- 3. Remove the (2) 9/32 screws securing the factory radio to the sub-dash.
- 4. Pull radio forward, disconnect the wire harness and antenna lead and remove radio.

2000-05 Saturn L Series

DASH DISASSEMBLY INSTRUCTIONS

- 1. Gently pry outward on dash trim bezel and remove.
- 2. Remove (2) 9/32 screws securing the factory radio to the sub-dash.
- 3. Carefully pull radio forward, disconnect wire harness and antenna lead and remove radio.

2000-02 Saturn S Series

DASH DISASSEMBLY INSTRUCTIONS

- 1. Remove (4) phillips screws from trim around steering column and remove trim.
- 2. Carefully unclip the dash trim on the left side of the steering column.
- 3. Carefully unclip the dash trim bezel from around the radio/climate controls and remove bezel.
- 4. Remove (2) 9/32 screws securing the factory radio to the sub-dash.
- 5. Carefully pull radio forward, disconnect wire harness and antenna lead and remove radio.

2002-05 Saturn Vue

DASH DISASSEMBLY INSTRUCTIONS

- 1. Set the parking brake.
- 2. Turn the ignition key to the on position. (DO NOT start the car) Depress the brake pedal and put the shift lever in the low position.
- 3. Carefully lift up on the trim around the shift lever and lower the trim out of the way.
- 4. Remove the (4) 9/32 screws securing the pocket located under the climate controls, and lower the pocket out of the way.
- 5. Carefully unclip the Radio/ climate control trim bezel.
- 6. Disconnect the plugs connected to the climate controls (do not remove the climate control heater cables from the climate control panel).
- 7. Disconnect the plugs from the panel feature buttons on the trim bezel and move the bezel to the side.
- 8. Remove the (2) 9/32 screws securing the radio to the sub-dash.
- 9. Pull the radio forward, disconnect the harness and antenna lead and remove radio.

NOTES