


## IN-DASH INSTALLATION KIT FOR 2007 SUZUKI SX4 VEHICLES

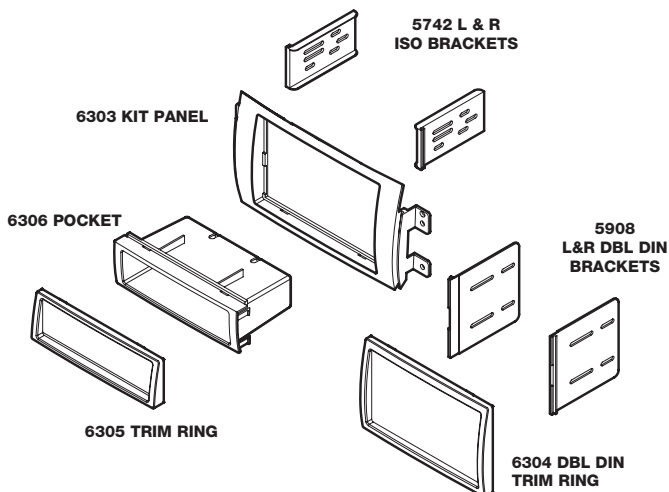

### INTRODUCTION / PRELIMINARY

This premium installation kit is for 2007 SUZUKI SX4 vehicles. Included are all the parts you need to mount your car stereo/cassette or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

#### CAUTION:

Disconnect your vehicle's negative battery terminal before the installation to help prevent electrical damage. We recommend the use of a volt/ohm meter over a test light to check wiring. A test light or grounded wire probe can cause damage to the vehicle's computer and/or diagnostic systems. Avoid all factory airbag wiring - airbags can accidentally deploy causing serious injury or death.

#### NOTES:

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

### FACTORY WIRING CODES

For Factory Wiring Codes go to: [www.scosche-cars.com](http://www.scosche-cars.com)

#### CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

##### SI04B

2003 -UP SUZUKI Power/4  
Speaker Connector



#### LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit (SI2228B) in 2007 SUZUKI SX4 Vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions, call our toll free technical help line at: **1-800-621-3695x3**

© 2007 SCOSCHE INDUSTRIES, INC.

SI 5/07 - SI2228B (3000003)

## RADIO REMOVAL

### 2007 SUZUKI SX4

#### RADIO REMOVAL:


1. Using a panel removal tool, unsnap trim on either side of the radio.
2. Extract (4) Phillips screws securing the radio.
3. Disconnect antenna and harness and remove.

## MOUNTING THE RADIO

#### DIN MOUNT


1. Slide pocket into kit panel from front until it snaps into place.
2. Next, slide DIN sleeve into kit panel from front and bend tabs.
3. Insert radio into sleeve until it snaps into place.

**NOTE:**  
REAR SUPPORT AVAILABLE  
SEPARATELY. REAR  
SUPPORTING THE RADIO  
ADDS TO THE INSTALLATION'S  
STRUCTURAL INTEGRITY.

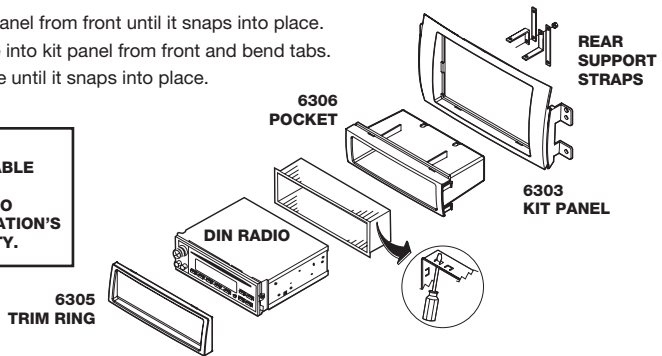

#### ISO DIN MOUNT

1. Slide pocket into kit panel from front until it snaps into place.
2. Slide left and right brackets into their corresponding slots in kit panel.
3. Mount radio to brackets with radio's supplied screws.
4. Snap trim ring into place.

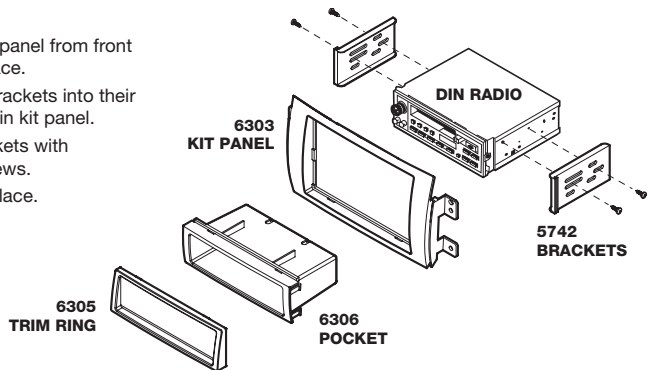

#### DOUBLE DIN MOUNT

1. Slide left and right double DIN brackets into their corresponding slots in kit panel.
2. Mount radio to brackets with factory radio's supplied screws.
3. Snap trim ring into place.

