


## IN-DASH INSTALLATION KIT FOR 2007-UP NISSAN MAXIMA

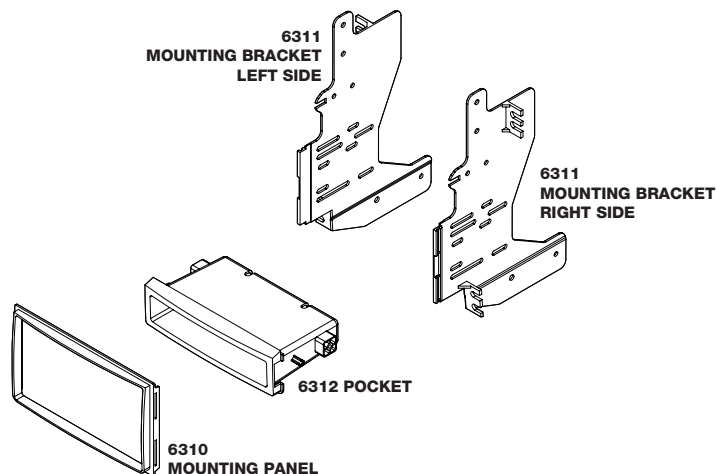

### INTRODUCTION / PRELIMINARY

This premium installation kit is for 2007 Nissan Maxima vehicles. Included are all the parts you need to mount your car stereo/cassette or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

#### CAUTION:

Disconnect your vehicle's negative battery terminal before the installation to help prevent electrical damage. We recommend the use of a volt/ohm meter over a test light to check wiring. A test light or grounded wire probe can cause damage to the vehicle's computer and/or diagnostic systems. Avoid all factory air bag wiring - air bags can accidentally deploy causing serious injury or death.

#### NOTES:

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

### FACTORY WIRING CODES

For Factory Wiring Codes go to: [www.scosche-cars.com](http://www.scosche-cars.com)

#### CAR STEREO CONNECTORS


PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

##### NN04

2007-Up Nissan

##### NAA2

2007-Up Nissan




#### LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this NN1640B kit for 2007 Nissan Maxima vehicles. Scosche Industries, Inc. can not be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

### MOUNTING THE RADIO


#### ISO DIN MOUNT

1. Snap the 6311 left and right brackets to the 6310 kit panel.
2. Align the 6312 pocket to the lower edge of the panel.  
Secure the pocket to the 6311 mounting brackets with the two (2) supplied screws in the installation kit.
3. Mount radio to brackets with the radio's supplied screws.

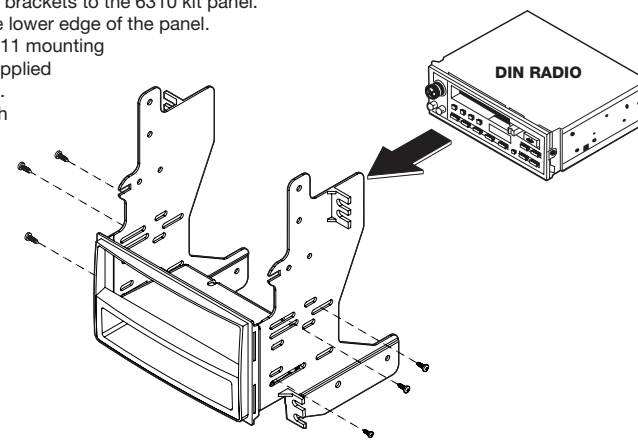

#### DOUBLE DIN MOUNT

1. Snap the 6311 left and right brackets to the 6310 kit panel.
2. Align, position and bolt the aftermarket double DIN-ISO head unit to the 6311 mounting brackets. Use the hardware supplied with the aftermarket double DIN-ISO head unit to secure the mounting brackets to the aftermarket radio.

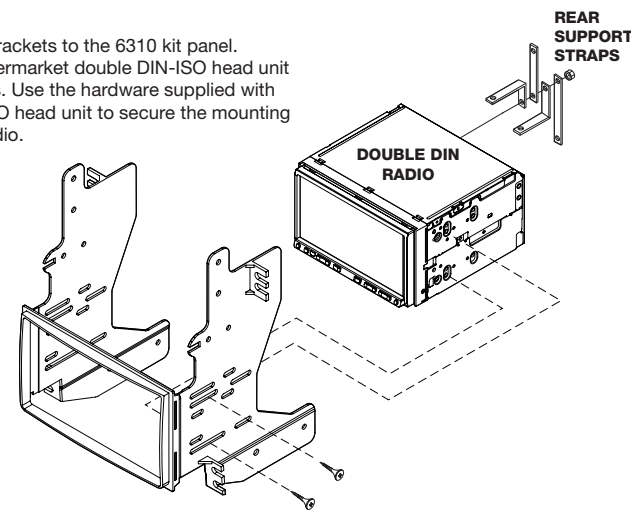

NOTE:  
REAR SUPPORTING THE RADIO  
ADDS TO THE INSTALLATION'S  
STRUCTURAL INTEGRITY.  
REAR SUPPORT AVAILABLE  
SEPARATELY.

### RADIO REMOVAL

#### 2007 Nissan Maxima

**Note:** The factory radio provision is for a DIN or Double DIN.

1. Remove shifter knob, slide down chrome trim, release snap ring in shifter knob, and pull knob off.
2. Remove shifter cover plate. The plate snaps off.
3. Remove panel around shifter assembly (includes hazard switch, pocket and A/C control panel). This panel pops off. Unplug main harness behind the hazard switch.
4. Remove the 2 Phillips screws holding lower radio dash trim in place. Unplug passenger airbag light.
5. Pull bottom of dash out until released, then lift up until to section releases.
6. Remove the 4 Phillips screws holding radio, radio display and A/C display. Unplug all plugs.
7. Remove the 8 torx screws from radio. Slide radio out of brackets.