




# American International

Car Stereo Installation Kits & Accessories

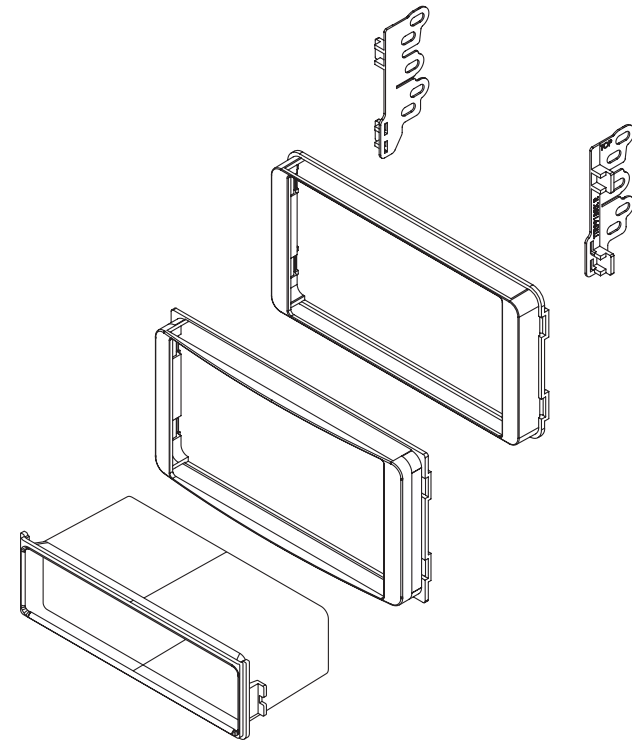

# TTR998 Mounting Kit

## VEHICLE APPLICATION

Toyota		Scion	
2003-09	4 RUNNER (Base Sport Edition)	2013-16	FR-S
2003-09	4 RUNNER SR5	2012-15	IQ
2000-05	CELICA	2005-16	TC
2000-05	ECHO	2004-06	XA
2007-14	FJ CRUISER	2004-15	XB
2001-07	HIGHLANDER	2008-14	XD
2013	HIGHLANDER		
2005-08	MATRIX		
2000-05	M2 SPYDER		
2001-05	RAV4		
2007-11	YARIS (w/o 3" Radio Display)		
2012-17	YARIS		



**www.aampglobal.com www.iaus.net**  
 2500 East Francis Street Ontario, CA 91761, U.S.A.  
 Sales: (800) 477-2267  
 Intl: (727) 572-9255  
 Support: 888-228-5560

## TRIM CHART

### Use 969 Trim on these applications

#### Toyota

12007-14 FJ CRUISER

2007-17 YARIS (Excluding radio w/2"x4" LCD display)

#### Scion

2004-06 xA

2004-15 xB

2008-14 xD

2005-10 TC

### Use 975 Trim on these applications

#### Toyota

2003-09 4-RUNNER SR 5 & SPORT EDITION (w/o RDS RADIO)

2000-05 CELICA

2000-05 ECHO

2001-07 HIGHLANDER (Excluding Hybrid w/ Factory Navigation)

2013 HIGHLANDER

2005-08 MATRIX

2000-05 MR2 SPYDER

2001-05 RAV4

#### Scion

2011-15 TC

## DASH DISASSEMBLY & RADIO REMOVAL INSTRUCTIONS

### 2000-05 TOYOTA CELICA

1. Gently lift upward shift lever trim panel and slide back, disconnect harness and remove.
2. Remove the (4) knobs from the A/C-heater controls.
3. Remove the (2) Phillips screws below the A/C-heater controls.
4. Remove the (2) Phillips screws securing the bottom edge of the climate controls to the subdash.
5. Gently pry upward and towards you the radio trim panel/climate control trim bezel and remove.
6. Remove the (4) 10mm bolts securing the radio.
7. Slide the radio forward, disconnect the wire harnesses and antenna lead and remove the radio.

### 2000-05 TOYOTA ECHO

1. Remove the (2) outer A/C-heater control knobs.
2. Remove the (2) Phillips screws from these locations.
3. Gently unsnap the A/C-heater control panel, disconnect the harnesses and remove.
4. Gently unsnap the trim from around the radio and remove.
5. Depress the tabs securing the heater controls in place and pull slightly forward and upward to allow access to the top radio mounting screws.
6. Remove the (4) Phillips screws securing the radio.
7. Gently slide the radio forward and disconnect the wire harnesses and antenna lead and remove the radio.

### 2000-05 TOYOTA MR2 SPYDER

1. Gently remove the screw cover caps from the lower sides of the radio mounting rails.
2. Remove the (2) phillips screws from the base of each side of the main radio support bracket covers, and remove the covers.
3. Remove the (4) phillips screws securing the radio to the sub-dash.
4. Remove the (4) screws securing the Drink Tray/Ashtray assembly, and lower the assembly out of the way.
5. Gently pull the radio forward.
6. Disconnect the harness and antenna lead from the radio and remove the radio.

## DOUBLE DIN INSTALLATION INSTRUCTIONS


### DOUBLE DIN KIT ASSEMBLY INSTRUCTIONS

1. Select the trim needed for your application, from trim chart.
  2. Attach ISO brackets to the rear of the Main Frame Trim.
  3. Attach the factory metal mounting brackets to the left and right sides of the aftermarket radio using the screws removed from the factory radio.
  4. Align the Main Frame Trim to the aftermarket radio and attach, If the metal bracket interferes with the plastic TTR brackets, then remove the factory brackets, and install over the TTR bracket.
- Note:** Some TTR bracket locations may share the same mounting locations as the factory brackets.

**Note:** Factory bracket alignment nubs can be removed if you are needing to move radio backwards because of a large nose radio, you also will need to drill additional holes in the factory brackets.

Figure B

USE ONLY THE PROPER MAINFRAME NEEDED (FLAT OR CURVED FACE).  
FROM CHART ON PAGE 1

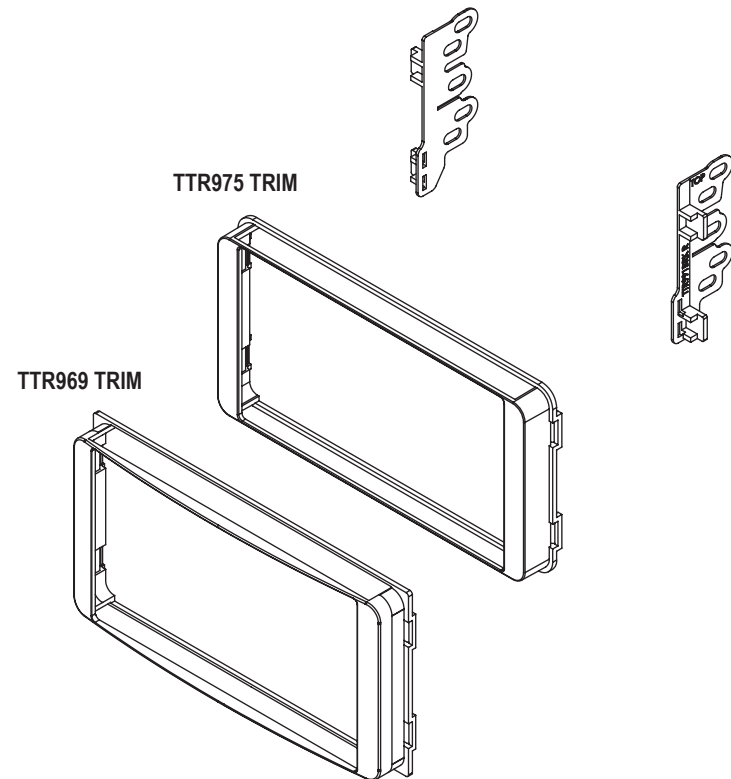

**2001-07 SCION xA**

1. Carefully pull outward on the left and right (rotary) climate control knobs and remove the phillips screw from behind each knob.
2. Carefully unclip and remove the side trims from beside the climate controls, ashtray and pocket.
3. Remove the (2) phillips screws securing the lower edges of the climate control/radio trim bezel to the sub-dash.
4. Carefully pry outward on the Climate control/radio trim bezel, disconnect all harnesses and remove trim bezel. **Continued on page 3**
5. Remove the (4) Phillips screws securing the factory radio to the sub-dash. Carefully pull radio forward, disconnect the wire harness and antenna lead from the radio and remove radio.

**2001-07 SCION xB**

1. Carefully pull outward on the left and right (rotary) climate control knobs and remove the Phillips screw from behind each knob.
2. Starting from the bottom of the Radio/Climate control trim bezel, pull the left and right side lower edges outward to release the lower clips.
3. Continue to pull the Radio/Climate control trim bezel outward and downward to release the upper top clips.
4. Pull the Radio/Climate control trim bezel outward and disconnect all harnesses from the rear of the bezel and remove bezel.
5. Remove the (4) Phillips screws securing the radio to the sub-dash.
6. Carefully pull the radio forward, disconnect the wire harness and antenna lead and remove radio.

**2008-12 SCION xB**

1. Carefully unsnap the rectangle bezel surrounding the factory radio.
2. Remove (4) 10mm bolts securing the factory radio in.
3. Disconnect all harnesses and remove radio from dash.

**2008-14 SCION xD**

1. There is a secondary sub dash bezel between the main dash board and the actual dash bezel.
2. Carefully remove the dash bezel starting at the top and work to the bottom just above the climate controls.
3. Unplug the necessary harness to remove bezel.
4. Remove (4) Philips screws securing factory radio in place.
5. Unplug radio harnesses and remove radio.

**2005-10 SCION TC**

1. Set the parking brake.
2. Insert key into the ignition switch and turn to the on position (DO NOT START THE CAR!!) then depress the brake pedal and place the shifter lever into the low position.
3. Carefully pry upward on the center console trim from around the shifter, disconnect the 12 Volt receptacle harness from the rear of the trim and remove trim.
4. Carefully pry Radio/Climate control trim bezel forward, starting at the bottom, disconnect the harness attached to the rear of the Climate controls and remove bezel.
5. Remove the (2) Phillips screws securing the lower factory radio brackets.
6. Remove the (2) 10 mm nuts securing the top radio mounting brackets.
7. Carefully pull radio forward, disconnect the harness or harnesses and antenna lead from the rear of the radio, and remove radio.
8. Re-assemble dash in reverse order.

**2011-14 SCION TC**

1. Carefully pull forward and remove the trim panel surrounding the radio, disconnect the attached wire harness and remove trim panel.
2. Remove the (4) 10mm bolts securing the factory radio to the sub-dash, carefully and pull the radio forward.
3. Disconnect all attached wire harnesses and the antenna lead and remove radio.

**2007-11 TOYOTA YARIS -4 DOOR SEDAN ONLY**

1. Carefully unclip and remove the bottom edge trim piece from below the climate control module.
2. Starting from lower edges, unclip the left and right side trims from around the radio and climate controls and remove.
3. Carefully unclip and pry forward the lower edge of the instrument gauge trim bezel.
4. Carefully unclip and pull forward the Radio/Vent trim bezel, disconnect the attached harness and remove bezel.
5. Remove the (4) Phillips screws securing the radio to the sub-dash.
6. Pull radio forward, disconnect the attached wire harness and antenna lead and remove radio.

**2012-14 TOYOTA YARIS**

1. Carefully unclip and remove the soft trim piece from around the radio, airbag light/hazard button and passenger side air vent.
2. Carefully unclip and pry forward the radio trim bezel.
3. Remove the (4) Phillips screws securing the radio to the sub-dash.
4. Pull radio forward, disconnect the attached wire harness and antenna lead and remove radio.

**2012 SCION IQ**

1. Carefully unclip and remove the panel with ac vents from around the hazard button. Unplug hazard button.
2. Carefully unclip and pry forward the radio trim housing. Do not unplug Airbag light.
3. Place the housing on the dash(you can use something to protect the dash) while installing new radio.
5. Remove the (4) 10mm bolts securing the radio to the sub-dash.
6. Pull radio forward, disconnect the attached wire harness and antenna lead and remove radio.

**2013-14 SCION FR S**

1. Carefully unclip and remove the panel surrounding the radio.
2. Remove the (4) 10mm bolts securing the radio to the sub-dash.
3. Pull radio forward, disconnect the attached wire harness and antenna lead and remove radio.

## KIT ASSEMBLY INSTRUCTIONS

### SINGLE ISO w/POCKET KIT ASSEMBLY INSTRUCTIONS


1. Select the trim needed for your application, from trim chart.
2. Attach both Left and Right side ISO brackets to the ISOPOC .
3. Attach ISO brackets and ISOPOC to the rear of the Main Frame Trim, inserting into one side of the main frame, then snapping into other side.
4. Attach the factory metal mounting brackets to the left and right sides of the aftermarket radio using the screws removed from the factory radio.
5. Align the Main Frame Trim to the aftermarket radio and attach, If the metal bracket interferes with the plastic TTR brackets, then remove the factory brackets , and install over the TTR bracket.

**Note:** Some TTR bracket locations may share the same mounting locations as the factory brackets.

**Note:** Factory bracket alignment nubs can be removed if you are needing to move radio backwards because of a large nose radio, you also will need to drill additional holes in the factory brackets.

Figure A

USE ONLY THE PROPER MAINFRAME NEEDED(FLAT OR CURVED FACE).  
FROM CHART ON PAGE 1

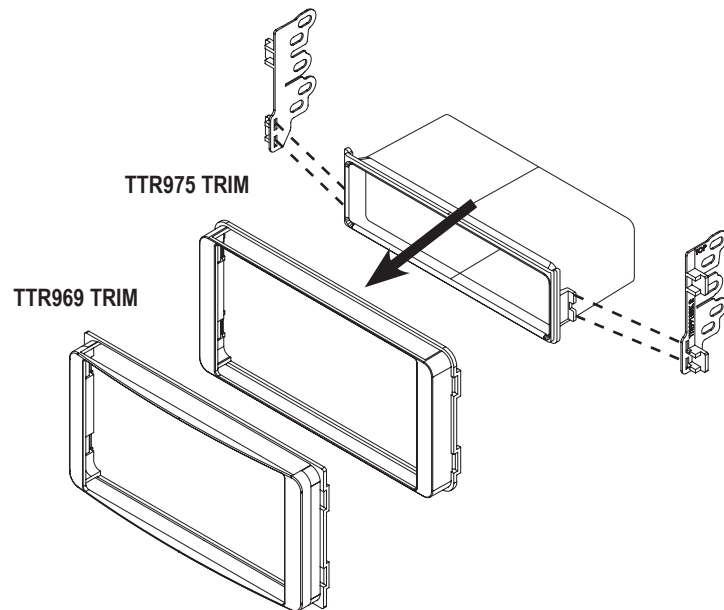

### 2003-09 TOYOTA RUNNER SR5

#### 2003-09 TOYOTA SPORT EDITION (Select Models)

1. Open the center pocket below the climate controls and remove the (1) 10 mm bolt.
2. Carefully Unclip the center console section with ashtray trim, disconnect the harness and remove console section.
3. Carefully lift the center console side covering and remove.
4. Remove the (2) lower 10 mm bolts from the bottom of driver side under dash panel.
5. Carefully pull drivers side under dash panel outward and lay out of the way.
6. Remove the (1) 10mm bolt at the lower edge of the radio trim bezel on the driver side.
7. Unclip the trim from the front of the center console pocket.
8. Carefully pry outward the climate control pod, disconnect the wire harness and remove ipod.
9. Remove the (2) 10mm bolts from behind the climate control location.
10. Carefully unclip the entire radio/climate control trim bezel, disconnect all harnesses from bezel and remove.
11. Remove the (2) 10mm bolts securing the factory radio to the sub-dash.
12. Carefully pull radio forward, disconnect all harnesses and antenna leads and remove radio.

#### 2001-05 TOYOTA RAV4

1. Remove the (4) chrome allen bolts securing the radio trim bezel.
2. Gently unsnap the radio trim bezel and remove.
3. Remove the (4) 10mm bolts securing the radio to the sub-dash.
4. Gently pull the radio forward.
5. Disconnect the harness and antenna lead from the radio and remove the radio.

#### 2004-06 TOYOTA HIGHLANDER

1. Starting from the bottom carefully unsnap and remove trim bezel from around climate controls and radio.
2. Remove (6) 10mm bolts securing entire climate controls / radio to sub-dash.
3. Pull the entire assembly forward, disconnect all harnesses and antenna lead, and remove assembly.
4. Remove the (8) phillips screws securing factory radio to assembly brackets and remove factory radio.

#### 2008-12 TOYOTA HIGHLANDER (without Factory Navigation)

1. Carefully unclip and remove the vent panel above the radio. The vent panel is held to the sub-dash with plastic clips.
2. Lower the glove box door.
3. Remove the climate control panel that extends from the glove box down to the access door for the auxiliary plug and up to the key cylinder area. The access door is attached to the trim bezel.
4. Remove the (4) 10mm bolts securing the radio in place.
5. There are (4) plastic clips left holding the radio in the sub dash.
6. Carefully pull forward the radio assembly to remove from the sub-dash.
7. Disconnect all harnesses and antenna leads attached to the radio assembly.

#### 2008-12 TOYOTA YARIS

1. Starting from lower edges, unclip the left and right side trims from around the radio and climate controls, disconnect the attached harnesses and remove trims.
2. Carefully unclip and pry forward the lower edge of the instrument gauge trim bezel.
3. Carefully unclip and pull forward the Radio/Vent trim bezel and remove.
4. Remove the (4) Phillips screws securing the radio to the sub-dash.
5. Pull radio forward, disconnect the attached wire harness and antenna lead and remove radio.