
For information about other American International automotive accessories visit our website at: http://www.aius.net





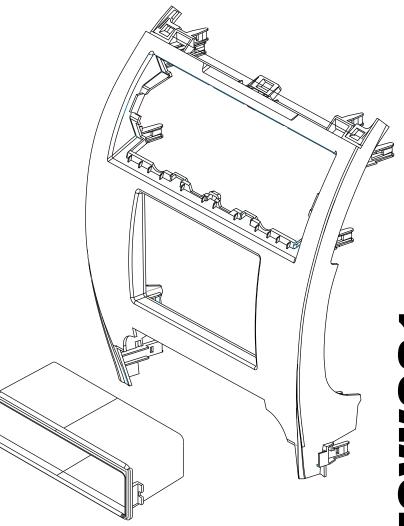

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777 _{iTOYK981}

VEHICLE APPLICATIONS

Toyota Camry 2012-2014.5

DASH DISASSEMBLY AND RADIO REMOVAL

- 1. Using a soft tool, carefully un-clip and remove the top dash trim from above the air vent.
- 2. Using a soft tool, carefully un-clip and remove the air vent above the radio.
- 3. Un-clip and remove the bottom console trim pieces, both the left and right sides.
- 4. Remove (4) 10mm bolts from the bottom and top of the OEM Radio brackets.
- 5. un-clip the OEM radio and unplug all harnesses. Remove.
- 6. Remove (6) radio screws, save for reinstallation.
- 7. Remove (4) screws holding the climate controls, save for reinstallation.
- 8. Remove (10) Panel clips from OEM radio, save for reinstallation.

Note: pay attention to the bottom 4 clips, they are designed to go onto specific posts.


PANEL ASSEMBLY INSTRUCTIONS

- 1. Reinstall (10) panel clips to the TOYK981 panel. The (4) bottom locations must have the correct flat side clips that were on the bottom locations of the OEM panel.
- 2. If installing a single ISO radio, snap supplied pocket into the bottom rear of the radio opening. If Installing a Double DIN radio do not use pocket.
- 3. Attach the OEM metal mounting brackets to the left and right sides of the aftermarket radio using the screws removed from the OEM radio.
- 4. Reinstall the OEM climate controls into the lower location of the OEM brackets using the (4) screws removed previously.

Note: The OEM climate controls can be adjusted using the OEM locators and (4) screws. So once the panel, climate controls and radio are reinstalled in the dash...if there is alignment problems remove and adjust.

Single ISO Installation

Note: Follow Panel Assembly Instructions, using the OEM brackets and snapping the pocket to the main frame.

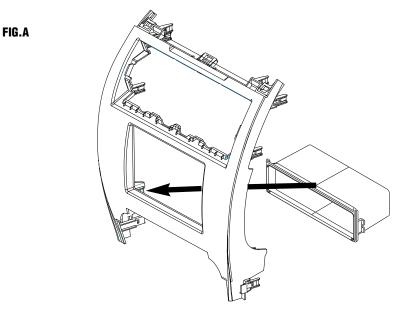

Double DIN Installation

Note: Follow Panel Assembly Instructions, using the OEM brackets.



