
For information about other American International automotive accessories visit our website at:

http://www.americaninternational.net





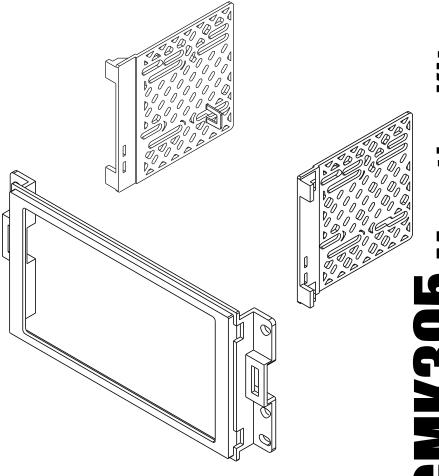

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

> CUSTOMER HELP LINE USA 800-323-4329 • Canada 800-245-8777

VEHICLE APPLICATIONS

Pontiac 2004-08 GRAND PRIX


iGMK395

DASH DISASSEMBLY INSTRUCTIONS

- 1. Carefully unclip the dash trim bezel from around the radio, disconnect the clock harness and remove trim bezel.
- 2. Remove the (4) Phillips screws securing the radio to the sub-dash.
- 3. Remove the (2) Phillips screws securing the lower pocket to the sub-dash.
- 4. Remove the (2) Phillips screws securing the Climate controls to the sub-dash.
- 5. Carefully pull the lower pocket and Climate controls slightly outward to allow the radio to be pulled out.
- 6. Pull radio forward, disconnect the wire harness(s) and antenna lead and remove radio.

DOUBLE DIN INSTALLATION INSTRUCTIONS

- 1. Attach ISO brackets to the rear of the main mounting kit.
- 2. Slide radio into kit from rear & attach to ISO mounting brackets using screws supplied with radio when possible or screws supplied with kit (do not tighten screws at this time).
- 3. Slide radio forward or backward for your desired look and then tighten the mounting screws.
- 4. Suggested...Attach rear support.



NOTES: